

Video Sentry Color Tilt

DOOR
1

ROOM
1

KC-1MRD



New

- Clear and bright image with color TFT LCD monitor and DSP video door station.
- TILT camera control

- INSTANT ON audio & image of door upon called
- Handsfree monitoring audio & image of door.
- White LED illuminator

KC-DAR
Video door station


KC-1MRD
Master station

Options

- KC-32EU**
Picture memory unit
→ P.32
- KA-DGR PANEL:** Panel only
→ P.28
- EL-9S**
Door release
→ P.97
- IER-2**
Call extension
→ P.96
- KAW-D 30° Angle Box**
→ P.33


AUDIO / VIDEO ENTRY SECURITY

Communication network & wiring

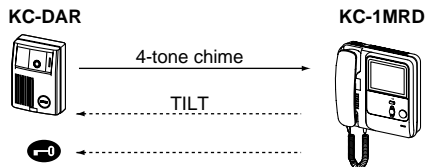


System components


KC-DAR: Video door station
KC-1MRD: Master station
24V DC power supply: PS-24E

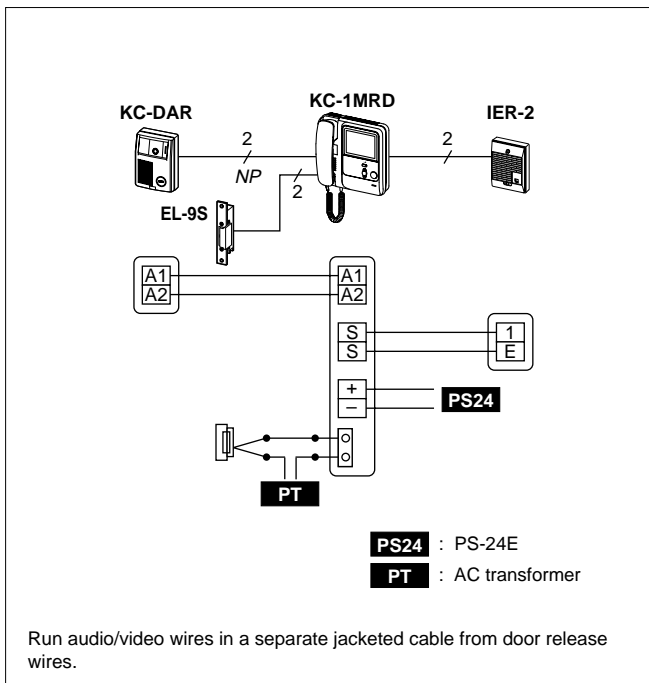

KC-DAR



KC-1MRD

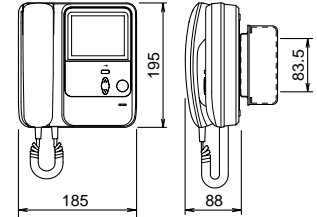

Specifications (KC-1MRD)

Power source	24V DC, 700mA.	
Power supply	PS-24E	
Communication	Door calls in w/4-tone chime & image, 30 sec. timed. Lift handset to reply, 2-1/2 min. timed. In standby, press MONITOR to view and hear door.	
Image view area	Approx. 60cm horiz., 111~235cm vert. at 130cm high and 50cm from camera.	
Night viewing	White light projected up to 30cm from camera. The background scene beyond 30cm can not be seen.	
Door release	12V AC, 500mA.	
Wiring	2 parallel wires to door, non-polarized.	
Distance	0.65mmø	1.0mmø
• KC-1MRD to door	50m	100m