


21"COLOR CCTV Monitor


VTM-21A




User control



Rear panel

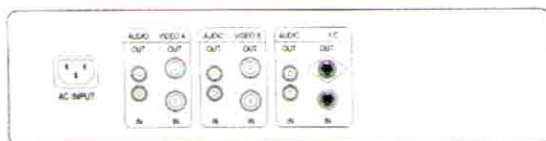

Dimensions

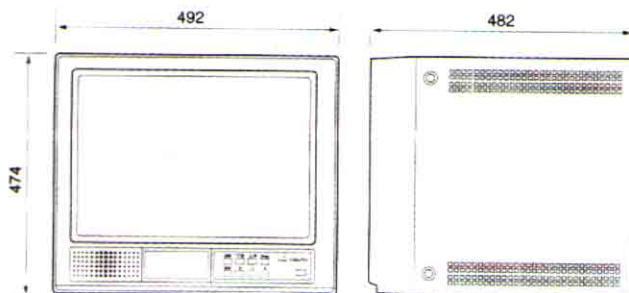

Features

- ▶ Multi-Language OSD (On Screen Display)user control
- ▶ Built-in 3 CH switcher by auto or manual
- ▶ Auto loop through
- ▶ Built-in microprocessor digital control
- ▶ Stackable metal cabinet
- ▶ High performance with high resolution more than 500 TV lines
- ▶ Dual scanning system NTSC/PAL compatible
- ▶ Universal power input AC100~240V
- ▶ Built-in clear and crisp speaker

Specification

| | |
|-------------------------------------|--|
| Picture Tube | 21" diagonal Flat Square Tube color |
| Horizontal Resolution | >500TV lines (Center) |
| Scanning Frequency | 15.743 KHz/60Hz(NTSC) 15.625KHz/50Hz(PAL) |
| Video Input | Composite Video 1.0Vp-p75Ω |
| Video Connections | Video BNC in × 2,Y/C in × 1 Video BNC out × 2,Y/C out × 1 |
| Audio Connections | RCA in × 3 RCA out × 3 |
| Control Front | Power on/off,OSD |
| Power Input | AC 100~240V,50/60 Hz |
| Power Consumption | 80W max |
| Dimension(W × H × D)Packing | 648 × 645 × 640mm |
| 492 Product | 492 × 474 × 482mm |
| Weight Net | 27.0kgs |
| Gross | 29.0kgs |
| Operating Humidity Condition | 10%~90% |
| Operating Temperature Range | -10℃~+50℃ |