



Features


- Max. resolution: 960x576 (P) / 960x480 (N)
- Recording:
 - WD1: 200 / 240 fps
 - D1: 400 / 480 fps
 - CIF: 400 / 480 fps
- H.264 video compression
- 1 internal SATA HDD
- HDMI/VGA video outputs
- Video extraction through network or using USB flash drive
- Video management software with sureSIGHT
- Supporting sureLINK for dynamic IP Internet connection
- iView HD for remote monitoring on mobile phones

Specifications

MODEL		JN216X	
VIDEO INPUT	STANDARD	PAL/CCIR, 625 lines, 25 frames per second NTSC/ EIA, 525 lines, 30 frames per second Composite video, 1Vp-p, BNC	
	NO. OF CHANNELS	16	
VIDEO OUTPUT	MAIN	HDMI	1 channel, 1920 x 1080
		VGA	1 channel, 1280 x 1024
		Composite	BNC x 1
	SPOT	BNC x 1	
RECORDING	MODE	Manual, schedule, motion, event-driven	
	HD TYPE	SATA x 1	
	MAX. RECORDING RATE PER CHANNEL (PAL / NTSC)	WD1: 12 / 15 fps D1: 25 / 30 fps CIF: 25 / 30 fps	
	PLAYBACK	Forward, Backward, Pause, Step forward, Step backward	
COMMUNICATION	NETWORK	RJ-45, 10/100 base-T ethernet (auto-sensing)	
	CONCURRENT USERS	10	
	WEB SERVER	Built-in	
	TELEMETRY CONTROL	RS-422 / 485	
	USB	USB2.0	
AUDIO	INPUT	4 channels, RCA, line level	
	OUTPUT	1 channel, RCA, line level	
EVENT HANDLING	EVENT TYPE	External alarm, video motion detection, video loss	
	ACTION TYPE	Buzzer, local recording, relay control, email notification, telemetry preset	
	EXTERNAL ALARM INPUTS	16 NC/NO	
RELAY SWITCH	NO. OF CHANNELS	1	
	MAX. LOADING	30V DC, 3A	
POWER	VOLTAGE	12V DC	
	MAX. RATING	60W	
OPERATING ENVIRONMENT	AMBIENT TEMPERATURE	0°C - 50°C	
	RELATIVE HUMIDITY	10% - 90%	
MECHANICAL DESIGN	DIMENSION	300mm (W) x 270mm (D) x 58mm (H)	
	WEIGHT	1.48.kg	

Dimensions

Unit: mm

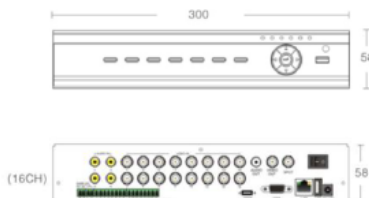

Pilot Engineering HK Ltd.

Rm H, 9/F, Block 4, Golden Dragon Ind. Centre, 182-190 Tai Lin Pai Road, Kwai Chung, N.T. Tel: 2736 6628